▼ Shown from left to right: **H4049L, G-2534R, G-4089L, G-2535L, G-4040L**



Visual Reference of System Pressure

Glycerine Filled (G-Series)

- **Dual scale reading calibrated in bar and psi**
- **All pressure sensing parts sealed and dampened by glycerine for long life**
- **Includes safety blow-out disk and pressure equalizing membrane**
- **Gauge snubbers or needle valves recommended for high cycle applications**

High Cycle Dry Gauges (H-Series)

- **Dual scale reading calibrated in bar and psi**
- **Ideal for use in many applications, specifically for high cycle and harsh environments**
- **Gauge snubbers or needle valves recommended to shut off gauge when not in use**





Gauge adaptor

For easy gauge installation into almost any system, Enerpac offers a complete line of gauge adaptors.

Page: **136**




Snubber Valve V-91

Infinitely adjustable for metering oil out of a gauge. The V-91 Snubber Valve is also suitable as a shut-off valve to protect the gauge during high cycle applications.

Page: **143**

◀ *When lifting or pressing, always use a gauge. A gauge is your 'window' to the system. It lets you see what's going on.*

Hydraulic Pressure Gauges

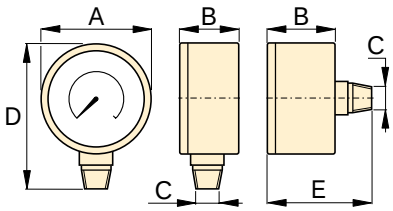

Dimensions (mm)						
Size	Connection	A	B	C	D	E
63	Lower Mount	63	37	1/4" NPTF	84	–
63	Center Rear	63	37	1/4" NPTF	–	63
100	Lower Mount	100	29	1/4" NPTF	121	–
100	Lower Mount	100	49	1/2" NPTF	136	–

Note: dimensions for reference only.

G
H
Series



Pressure Range:
0-1000 bar/15.000 psi

Face Diameter:
63-100 mm

Accuracy, % of full scale:
±1,0 - 1,5%



Maximum Indicating Pointer

Indicator retains peak readings of pressure or force generated by the system.
Order model number: **BSA-881**.

Note: For use on H-Series of gauges only.

▼ SELECTION CHART

Gauge Series	Pressure Range		Model Number				Major Graduation		Minor Graduation		Major Graduation		Minor Graduation	
			ø 63 1/4 NPTF Lower Mount	ø 63 1/4 NPTF Center Rear	ø 100 1/4 NPTF Lower Mount	ø 100 1/2 NPTF Lower Mount	bar				psi			
	(bar)	(psi)	Accuracy: ± 1,5 %		Accuracy: ± 1,0 %		ø 63	ø 100	ø 63	ø 100	ø 63	ø 100	ø 63	ø 100
G-Series	0-7	0-100	**G2509L**	–	–	–	1	–	0,01	–	10	–	2	–
	0-11	0-160	**G2510L**	–	–	–	1	–	0,02	–	10	–	2	–
	0-14	0-200	**G2511L**	–	–	–	1	–	0,02	–	50	–	5	–
	0-20	0-300	**G2512L**	–	–	–	5	–	0,50	–	50	–	5	–
	0-40	0-600	**G2513L**	–	–	–	10	–	1	–	100	–	10	–
	0-70	0-1.000	**G2514L**	**G2531R**	–	–	10	–	1	–	100	–	20	–
	0-140	0-2.000	**G2515L**	–	–	–	10	–	2	–	500	–	50	–
	0-200	0-3.000	**G2516L**	–	–	–	50	–	5	–	500	–	50	–
	0-400	0-6.000	**G2517L**	**G2534R**	–	–	100	–	10	–	1000	–	100	–
	0-700	0-10.000	**G2535L**	**G2537R**	**G4088L**	**G4039L**	100	100	10	10	2000	1000	200	100
	0-1000	0-15.000	**G2536L**	**G2538R**	**G4089L**	**G4040L**	100	100	20	20	3000	3000	200	200
H-Series	0-700	0-10.000	–	–	**H4049L**	**H4071L**	–	100	–	10	–	1000	–	100